Utah State University DigitalCommons@USU

All U.S. Government Documents (Utah Regional Depository)

U.S. Government Documents (Utah Regional Depository)

1-1-2004

Selected Hydrologic Data for Sand Cove Wash, Washington County, Utah

Aaron Norton

David D. Susong

Recommended Citation

Norton, Aaron and Susong, David D., "Selected Hydrologic Data for Sand Cove Wash, Washington County, Utah" (2004). *All U.S. Government Documents (Utah Regional Depository)*. Paper 140. http://digitalcommons.usu.edu/govdocs/140


This Report is brought to you for free and open access by the U.S. Government Documents (Utah Regional Depository) at DigitalCommons@USU. It has been accepted for inclusion in All U.S. Government Documents (Utah Regional Depository) by an authorized administrator of DigitalCommons@USU. For more information, please contact becky.thoms@usu.edu.





Selected Hydrologic Data for Sand Cove Wash, Washington County, Utah

Open-File Report 2004-1328

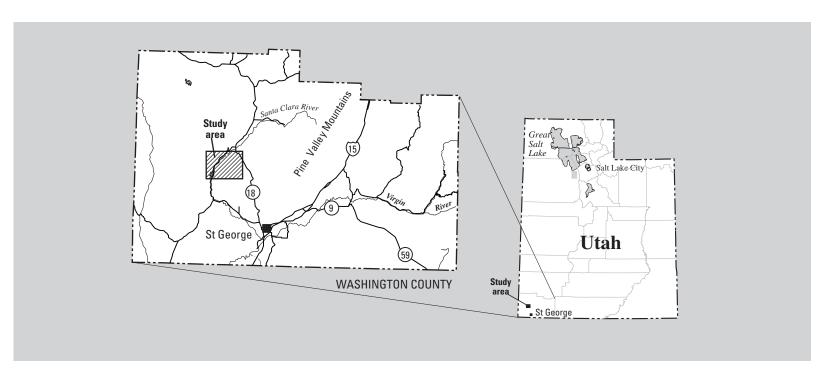

Prepared in cooperation with the Washington County Water Conservancy District

including suggestions for reducing	ompleting and reviewing the collect this burden, to Washington Headqu uld be aware that notwithstanding ar DMB control number.	arters Services, Directorate for Info	rmation Operations and Reports	s, 1215 Jefferson Davis	Highway, Suite 1204, Arlington			
1. REPORT DATE 2004		2. REPORT TYPE N/A		3. DATES COVERED				
4. TITLE AND SUBTITLE				5a. CONTRACT	NUMBER			
Selected Hydrologi Utah	c Data for Sand Co	ve Wash, Washingt	on County,	5b. GRANT NUN	MBER			
Ctan				5c. PROGRAM E	ELEMENT NUMBER			
6. AUTHOR(S)				5d. PROJECT NU	JMBER			
				5e. TASK NUMBER				
				5f. WORK UNIT	NUMBER			
	ZATION NAME(S) AND AE f the Interior U.S. G OC 20240	` /	349 C. Street,	8. PERFORMING REPORT NUMB	G ORGANIZATION ER			
9. SPONSORING/MONITO	RING AGENCY NAME(S) A	AND ADDRESS(ES)		10. SPONSOR/M	ONITOR'S ACRONYM(S)			
				11. SPONSOR/M NUMBER(S)	ONITOR'S REPORT			
12. DISTRIBUTION/AVAIL Approved for public	ABILITY STATEMENT ic release, distributi	on unlimited						
13. SUPPLEMENTARY NO	OTES							
14. ABSTRACT								
15. SUBJECT TERMS								
13. SUPPLEMENTARY NOTES 14. ABSTRACT 15. SUBJECT TERMS 16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF	18. NUMBER	19a. NAME OF			
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	- ABSTRACT UU	OF PAGES 13	RESPONSIBLE PERSON			

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and

Report Documentation Page

Form Approved OMB No. 0704-0188

Selected Hydrologic Data for Sand Cove Wash, Washington County, Utah

By Aaron Norton and David D. Susong

U.S. GEOLOGIOCAL SURVEY

OPEN-FILE REPORT 2004-1328

PREPARED IN COOPERATION WITH

WASHINGTON COUNTY WATER CONSERVANCY DISTRICT

U.S. DEPARTMENT OF THE INTERIOR

GALE A. NORTON, Secretary

U.S. GEOLOGICAL SURVEY

Charles G. Groat, Director

Any use of trade, product, or firm names in this publication is for descriptive purposes only and does not imply endorsement by the U.S. Government.

For additional information write to:

District Chief U.S. Geological Survey 2329 Orton Circle Salt Lake City, Utah 84119 http://ut.water.usgs.gov Copies of this report can be purchased from:

U.S. Geological Survey Branch of Information Services Building 810 Box 25286, Federal Center Denver, CO 80225-0286

CONTENTS

Anstract		٠. ا
Introduct	tion	1
Des	scription of Study Area	1
Data Coll	lection	3
Spe	ecific Conductance	4
Par	ticle-Size Distribution and Hydraulic Conductivity	6
	y	
	ces Cited	
Figure	es	
	Map showing location of boreholes in Sand Cove Wash, Washington County, Utah	
Tables	S	
Table 1. Table 2.	Lithologic logs of selected boreholes in Sand Cove Wash, Washington County, Utah	
Table 3.	Particle-size distribution of alluvial deposits along Sand Cove Wash, Washington County, Utah	
Table 4.	Hydraulic properties of core samples collected from unconsolidated deposits in Sand Cove Wash, Washington County, Utah	6

CONVERSION FACTORS, DATUMS, AND ABBREVIATED WATER-QUALITY UNITS

Multiply	Ву	To obtain
acre-foot (acre-ft)	1.213	cubic meter
acre-foot per year (acre-ft/yr)	1,233	cubic meter per year
foot (ft)	0.3048	meter
foot per day (ft/d)	0.3048	meter per day
inch (in.)	0.0254	meter
mile (mi)	1.6093	kilometer
pound per square inch (lb/in ²)	703.0695	kilogram per square meter
square mile (mi ²)	2.59	kilometer

Temperature in degrees Celsius (°C) may be converted to degrees Fahrenheit (°F) as follows:

Temperature in degrees Fahrenheit (°F) may be converted to degrees Celsius (°C) as follows:

The permeability of a porous medium is commonly measured in millidarcies. One millidarcy, or 1/1000 darcy, will allow a flow of one milliliter per second of fluid of one centipoise viscosity through one square centimeter under a pressure gradient of one atmosphere per centimeter.

Vertical coordinate information is referenced to the North American Datum of 1929 (NAD29). Horizontal coordinate information is referenced to the North American Datum of 1983 (NAD83).

Specific conductance is reported in microsiemens per centimeter at 25 degrees Celsius (µS/cm at 25°C).

SELECTED HYDROLOGIC DATA FOR SAND COVE WASH, WASHINGTON COUNTY, UTAH

By Aaron Norton and David D. Susong

Abstract

Southwestern Utah is one of the most arid and fastest growing regions of Utah. Development of new and existing water resources will be required to meet the water needs of the region. Sand Cove Wash, a tributary of the Santa Clara River that flows into Gunlock Reservoir, was investigated as a potential site for diverting peak runoff from the Santa Clara River in order to delay its arrival at the reservoir or to artificially recharge alluvial sediment or the underlying Navajo aquifer. Hydrologic data collected in this study are described and listed in this report. Six boreholes were drilled in Sand Cove Wash to determine the vertical and spatial distribution of the alluvial deposits and their hydrologic properties. Nine to 13 feet of fine alluvial sand is underlain by 50 to 70 feet of fine silt and clay. Core samples were analyzed for specific conductance of leachates, particle-size distribution, and saturated vertical hydraulic conductivity. Specific-conductance values of leachates ranged from 23 to 2,940 microsiemens per centimeter. Vertical hydraulic-conductivity values from selected samples ranged from 1.92 x 10⁻⁴ to 2.5 feet per day.

Introduction

The population of Washington County, one of the most arid counties of Utah, has been growing rapidly for the past two decades. Ground- and surface-water resources have been extensively developed throughout the county with well fields in the regional Navajo aquifer and reservoirs on the Virgin and Santa Clara Rivers. The Santa Clara River, a tributary of the Virgin River, drains a large watershed that includes the Pine Valley Mountains to the north and east of St. George, Utah (fig. 1).

Runoff to the Santa Clara River from the Pine Valley Mountains exceeds the amount of available storage in Gunlock Reservoir on average every 3 to 4 years. In high runoff years, excess water is spilled from the reservoir. The long-term average annual streamflow above Gunlock Reservoir was 18,070 acre-ft/yr for 1970-2001 (B. Schlotthauer, Utah Division of Water Rights, written commun., 2004). Computer modeling done by the Utah Department of Water Rights for Gunlock Reservoir for 1970-98 simulated an average annual volume of water spilled of 7,618 acre-ft with a minimum spill of 285 acreft and a maximum of 48,812 acre-ft (B. Schlotthauer, Utah Division of Water Rights, written commun., 2004).

The creek in Sand Cove Wash is an ephemeral tributary to the Santa Clara River and discharges into the eastern side of Gunlock Reservoir. Water diverted from the Santa Clara River into Sand Cove Wash using existing infrastructure could artificially recharge alluvial sediments, thereby temporarily storing or delaying the peak snowmelt runoff and artificially recharging the underlying regional Navajo aquifer. The Washington County Water Conservancy District, U.S. Bureau of Reclamation, and U.S. Geological Survey conducted a cooperative hydrogeologic study of Sand Cove Wash to evaluate the potential of diverting peak runoff from the Santa Clara River into Sand Cove Wash for temporary storage. This report compiles selected hydrologic data collected during the study of Sand Cove Wash, including borehole lithologic logs, particle-size analyses of borehole samples, laboratory-determined saturated vertical hydraulic-conductivity values of alluvial wash sediments, and specific-conductance values of core leachates. Complete results of the study are reported in Norton (2004).

Description of Study Area

Sand Cove Wash (fig. 1) is located about 30 mi northwest of the city of St. George in southwestern Utah. The drainage basin covers about 9 mi² and the wash is about 8.5 mi in length.

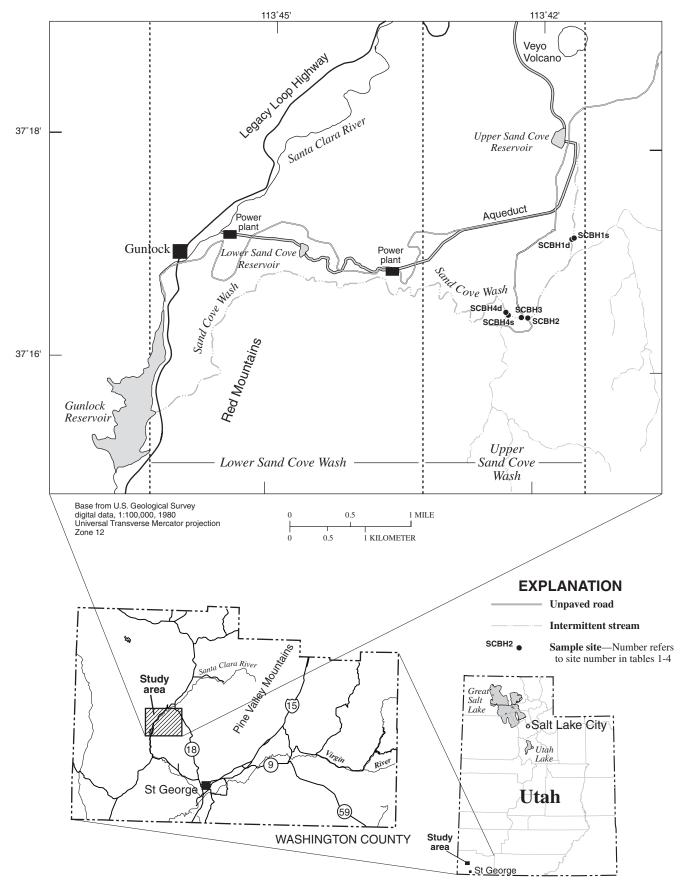


Figure 1. Location of boreholes in Sand Cove Wash, Washington County, Utah.

The wash can be divided into two parts on the basis of topography and geomorphology (Norton, 2004). The upper part of the wash is about half a mile in width and is relatively flat. Two major tributaries discharge into the upper part, and the channel is underlain by unconsolidated sand and basalt cobbles. The lower part of the wash narrows into a slot canyon that is eroded into the Navajo Sandstone. In some areas, the northern side of the canyon consists of basalt that originated from the Vevo Volcano. The channel is narrow and characterized by shallow sands and basalt cobbles overlying sandstone or by exposed sandstone. The channel width is about 10-20 ft along its length. Calculated topographic gradients were 0.0165 and 0.0271 for the upper and lower parts, respectively.

Data Collection

Six boreholes were drilled at four sites in Sand Cove Wash (fig. 1) to collect cores to determine the vertical and spatial distribution of sediments in the wash and their hydrologic properties. A drill rig equipped with a 6-in-diameter hollow stem auger was used for drilling in unconsolidated alluvium and a 4-in-diameter rotary air bit was used for consolidated rock. Two of the sites had paired boreholes with each pair consisting of one borehole inside the channel of Sand Cove Wash and one outside. Boreholes at the other sites were located inside the channel. Core samples were collected at selected depths with a split-spoon sampler in unconsolidated alluvium and as a continuous core in sandstone. Nine to 13 ft of fine alluvial sand was underlain by 50-70 ft of fine silts and clays, beneath which was either Navajo Sandstone or basalt. Lithologic logs for the boreholes are contained in table 1.

Cores collected at selected depths were analyzed for specific conductance of leachates, particle-size distribution, and saturated vertical hydraulic conductivity. Analysis of particle-size distribution and hydraulic conductivity was done by Terra Tek of Salt Lake City, Utah.

Lithologic logs of selected boreholes in Sand Cove Wash, Washington County, Utah

[Borehole location, altitude, and material: See figure 1 for location of boreholes; Thickness, in feet; Depth, total depth to bottom of interval, in feet below

Borehole location, altitude, and material	Thickness	Depth		
SCBH1s Altitude 4,420 feet				
Sand, fine with cobbles	18.5	18.5		
Clay, sandy brown with cobbles	15.5	34.0		
Clay, silty brown	14.0	48.0		
Clay, with basalt cobbles	2.0	50.0		
SCBH1d Altitude 4,420 feet				
Sand, fine with cobbles	13.5	13.5		
Clay, silty brown and dry	19.5	33.0		
Clay, silty red and moist	20.0	53.0		
Clay, red with basalt cinders	17.0	70.0		
Basalt cobbles	3.5	73.5		
Basalt	2.5	75.0		
SCBH2 Altitude 4,350 feet				
Sand, fine with gravel	8.5	8.5		
Clay, silty brown	11.5	20.0		
SCBH3 Altitude 4,340 feet				
Sand, fine with gravel	14.0	14.0		
Clay, brown silty to sandy	13.0	27.0		
Clay, brown silty	10.5	37.5		
Clay, brown silty	5.0	42.5		
Clay, darker brown with silt	19.5	62.0		
Basalt	1.0	63.0		
SCBH4s Altitude 4,340 feet				
Sand, fine with cobbles	4.0	4.0		
Sand, fine with coarse gravel	3.5	7.5		
Sand, fine with gravel	8.0	15.5		
Clay, silty brown with sand	27.5	43.0		
Clay/basalt, alternating layers	22.5	65.5		
Basalt	4.5	70.0		
Clay/basalt, alternating layers	6.0	76.0		
Basalt	4.0	80.0		
Clay/basalt, alternating layers	4.0	84.0		
Basalt	11.0	95.0		
SCBH4d Altitude 4,340 feet				
Sand, fine with cobbles	9.0	9.0		
Clay, silty to sandy brown	73.0	82.0		
Sandstone, white, fractured	82.0	164.0		

4 Selected Hydrologic Data for Sand Cove Wash, Washington County, Utah

Specific Conductance

Split-spoon core samplers have a removable "shoe" that holds the two halves of the device together. The shoe holds a small amount of core that is generally discarded. Shoe samples in this study were collected and used to evaluate the relative accumulation of solutes in the unsaturated zone. Areas with high unsaturated-zone solute accumulation generally indicate low rates of natural recharge (Allison and others, 1994; Cook and others, 1992; Scanlon, 1991). Samples were processed to dissolve salts from grain surfaces into aqueous phase leachates whose conductivity was then measured.

Leachates were extracted from core samples by first drying the samples in an oven for 24 hours at 105°C. Then equal weights of dry sediment and deionized water were mixed and placed in a shaker for 24 hours. The resulting leachates were decanted into vials and the specific conductance of the decanted water was measured. Specific-conductance values of these leachates ranged from 23 µS/cm to 2,940 µS/cm (table 2). The relation of depth to specific conductance at the four drill sites is shown in figure 2. Specific-conductance values of the leachates generally were less than 500 uS/cm except for those measured from borehole SCBH4s. This borehole is located about 200 ft outside the wash and had measured leachate specificconductance values of as much as 2,940 µS/cm. The high values were measured from samples obtained from the shallow part of the borehole (fig. 2) and are similar to shallow solute bulges observed at other sites in the

 Table 2.
 Specific-conductance value of leachates from core samples collected in Sand Cove Wash, Washington County, Utah

[See figure 1 for borehole location; $\mu S/cm$, microsiemens per centimeter at 25 degrees Celsius]

Borehole location	Depth (feet below land surface)	Specific conductance (µS/cm)
SCBH1s	14.0	285
	19.0	440
	24.0	110
	25.5	195
	44.0	90
	49.0	89
SCBH1d	24.0	305
	25.5	150
	34.0	34
	35.5	115
	44.0	96
	54.0	90
	64.0	76

Table 2. Specific-conductance value of leachates from core samples collected in Sand Cove Wash, Washington County, Utah—Continued

Borehole location	Depth (feet below land surface)	Specific conductance (µS/cm)		
SCBH1d—Continued	64.8	74		
SCBH2	14.0	135		
	15.5	85		
SCBH3	14.0	285		
	34.0	300		
	58.5	170		
	62.0	200		
CODIII	14.0	(10		
SCBH4s	14.0	610		
	15.5	1,500		
	24.0	2,350		
	25.5	2,570		
	34.0	2,940		
	35.5	2,050		
	44.0	1,730		
	47.5	2,030		
	48.5	1,630		
	53.5	2,400		
	63.5	200		
	73.0	96		
	74.5	105		
	83.0	67		
SCBH4d	4.0	74		
	9.0	265		
	14.0	245		
	15.5	255		
	24.0	78		
	25.5	110		
	34.0	130		
	35.5	140		
	44.0	67		
	45.5	160		
	54.0	100		
	55.5	73		
	64.0	130		
	74.0	240		
	82.5	120		
	90.0	25		
	100.0	27		
	110.0	33		
	120.0	33		
	130.0	23		
	140.0	45		
	150.0	31		
	160.0	41		

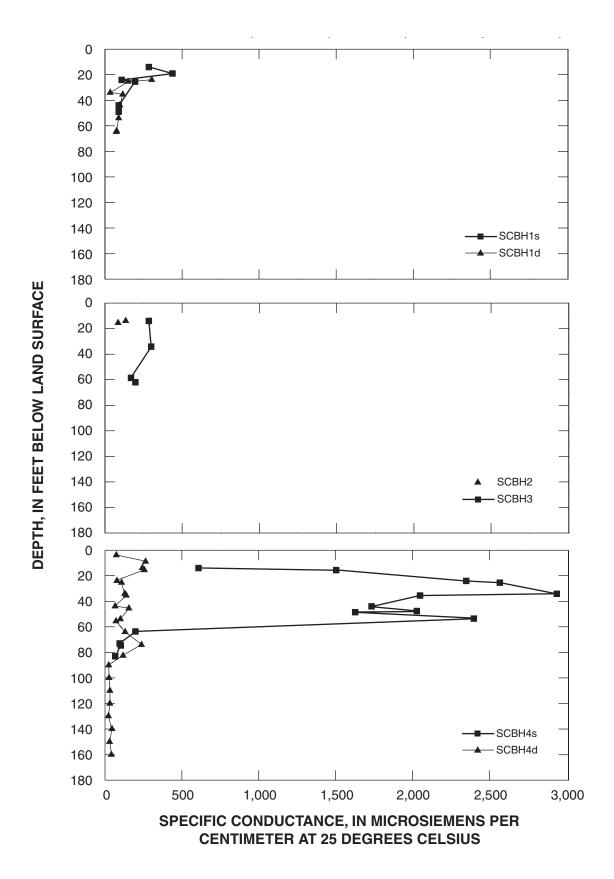


Figure 2. Relation of depth to specific conductance for leachates from core samples collected in Sand Cove Wash, Washington County, Utah.

southwestern United States (Scanlon, 1991; Phillips and others, 1988; Prudic, 1994).

Particle-Size Distribution and Hydraulic Conductivity

Particle-size distribution and vertical hydraulic conductivity were determined for selected samples. Particle-size distribution was determined by laser analysis and hydraulic conductivity by American Society for Testing and Materials (ASTM) method D5084. Three samples collected from two boreholes at depths of 4 ft, 14 ft, and 34 ft were analyzed and the results are shown in tables 3 and 4.

Saturated vertical hydraulic conductivity was determined for the three borehole samples by using the falling head permeameter method (ASTM method D2434). The three samples at depths of 4 ft (fine sand), 14 ft (coarse silt), and 34 ft (coarse silt) had vertical hydraulic-conductivity values of 2.50, 1.92 x10⁻⁴, and 1.0 x10⁻² ft/day, respectively.

Summary

Hydrologic data collected in Sand Cove Wash in southwestern Utah to determine the vertical and spatial distribution of alluvial sediments and their hydrologic properties are compiled in this report. Six boreholes were drilled in or next to the wash. Lithologic logs of the boreholes generally indicate that 9 to 13 ft of fine sand overlie 50-70 ft of fine silt and clay, which overlie Navajo Sandstone or basalt bedrock. Cores collected from selected depths were analyzed for specific conductance of leachates, particle-size distribution, and saturated vertical hydraulic conductivity. Specific-conductance values of leachates ranged from 23 to 2,940 µS/cm. Vertical hydraulic-conductivity values measured in three samples were 2.50, 1.92×10^{-4} , and 1.00×10^{-2} ft/d. The soil descriptions for the three samples were fine sand, coarse silt, and coarse silt, respectively.

Table 3. Particle-size distribution of alluvial deposits along Sand Cove Wash, Washington County, Utah

[See figure 1 for location of borehole. Description: Wentworth Classification]

		Particle-size distribution (weight, in percent)														
Borehole location	Depth (feet)	Description				S	and						Silt			Clay
			Pebble	Granule	Very coarse	Coarse	Medium	Fine	Very fine	Total	Coarse	Medium	Fine	Very fine	Total	Total
SCBH4d	4.0	Fine Sand	0.00	0.00	0.00	0.19	34.19	50.03	8.79	93.20	1.68	1.19	1.06	1.05	4.98	1.83
SCBH3	14.0	Coarse Silt	.00	.00	.00	.00	.93	10.27	19.25	30.45	24.00	19.48	10.43	6.44	60.35	9.18
SCBH3	34.0	Coarse Silt	.00	.00	.00	.00	.00	2.96	18.20	21.16	25.07	18.27	12.12	9.28	64.74	14.11

Table 4. Hydraulic properties of core samples collected from unconsolidated deposits in Sand Cove Wash, Washington County, Utah [See figure 1 for location of borehole. Millidarcy, 1 darcy equals 9.87 x 10⁻¹³ m²]

Borehole Depth location (feet below land surface)		Average permeability (millidarcies)	Average vertical hydraulic conductivity (feet per day)			
SCBH4d	4.0	903	2.50			
SCBH3	14.0	.07	1.92 x 10 ⁻⁴			
SCBH3	34.0	3.58	1.00 x 10 ⁻²			

References Cited

- Allison, G.B., Gee, G.W., and Tyler, S.W., 1994, Vadose-zone techniques for estimating groundwater recharge in arid and semiarid regions: Soil Science Society of America Journal, 58, no. 1, p. 6-14.
- Cook, P.G., Walker, G.R., and Jolly, I.D., 1992, Spatial variability of groundwater recharge in a semiarid region: Journal of Hydrology, v. 111, p. 195-212.
- Norton, A., 2004, Evaluation of an ephemeral wash for spring runoff storage, Washington County, Utah: University of Utah M.S. thesis, 77 p.
- Phillips, F.M., Mattick, J.L., and Duval, T.A., 1988, Chlorine 36 and tritium from nuclear weapons fallout as tracers for long-term liquid movement in desert soils: Water Resources Research, 24, p. 1877-1891.
- Prudic, D.E., 1994, Estimates of percolation rates and ages of water in unsaturated sediments at two Mohave Desert sites, California-Nevada: U.S. Geological Survey Water-Resources Investigations Report 94-4160, 19 p.
- Scanlon, B.R., 1991, Evaluation of moisture flux from chloride data in desert soils: Journal of Hydrology, 128, p. 137-156.