

Utah State University

DigitalCommons@USU

Senior Theses and Projects

Materials Physics

3-2015

Simulation of UV Radiation Degradation of Polymers on MISSE-6 in the Low Earth Orbit Environment

Kelby T. Peterson
Utah State University

JR Dennison
Utah State University

Follow this and additional works at: https://digitalcommons.usu.edu/mp_seniorthesesprojects



Part of the [Condensed Matter Physics Commons](#)

Recommended Citation

Peterson, Kelby T. and Dennison, JR, "Simulation of UV Radiation Degradation of Polymers on MISSE-6 in the Low Earth Orbit Environment" (2015). *Senior Theses and Projects*. Paper 25.

https://digitalcommons.usu.edu/mp_seniorthesesprojects/25

This Report is brought to you for free and open access by the Materials Physics at DigitalCommons@USU. It has been accepted for inclusion in Senior Theses and Projects by an authorized administrator of DigitalCommons@USU. For more information, please contact digitalcommons@usu.edu.



Degradation of Space Polymers: A Case Study

Kelby Peterson

Department of Physics
4900 Project
Research Mentor: J.R. Dennison
April 2015

Abstract

Materials International Space Station Experiment 6 (MISSE-6) was an experiment designed to examine the consequences of the space environment on various materials used in space-component design. USU's contribution was comprised of approximately 180 samples that were suspended from the side of the International Space Station (ISS) for 18 months and returned to allow for pre- and post-flight comparisons. The sample with the most evident changes was a thin film of polyethylene terephthalate (PET) MylarTM coated with Vapor Deposited Aluminum (VDA). The post-flight analysis showed evidence of atomic oxygen erosion of the VDA layer, UV-induced discoloration of the polymer, and a crater created by a micrometeoroid impact. This project includes an analysis of the UV-induced discoloration and the creation of laboratory tests to simulate this discoloration. The UV tests place MylarTM samples under vacuum and then expose them to varying intensities of UV radiation. Using an array of deuterium lamps and an elliptical reflector allows for a condensed time span and a quantification of the discoloration of the polymer through comparison of the UV/Vis/NIR reflection spectra. The results from the UV simulation are used to determine the approximate time period of the UV exposure for the VDA coated MylarTM sample and in turn the erosion rate of the VDA layer. This project also includes an analysis of the impact crater and ramifications of the micrometeoroid impact.

Introduction

Materials International Space Station Experiment 6 (MISSE-6) was a NASA funded project that began in 2007 to test varying effects on materials whilst exposed to the space environment. This collaborative effort brought various universities, aerospace companies, and government organizations together to expose samples to the space environment in order to characterize the degradation of materials used in space component design (2). Samples of various materials used in space-component design were flown on MISSE-6 and spent 18 months suspended from the Columbus Space Laboratory, off the side of the International Space Station (ISS) see Figure 1.



Figure 1 MISSE-6 on ISS.

The Utah State University's State of Utah Space Environment & Contamination Study (SUSpECS) project was a unique student led experiment that allowed for pre- and post-flight analysis of the approximately 180 material samples, which were returned in pristine condition after exposure to the space environment (1). While this project centered on the SUSpECS portion of MISSE-6, the MISSE experiments are ongoing with MISSE-8 currently on the ISS (3). Investigation of the returned MISSE-6 samples, particularly a Vapor Deposited Aluminum (VDA) coated MylarTM sample, showed signs of sever degradation due to UV radiation, as shown in Figure 4 (7).

Motivation

Material degradation of materials like those flown on SUSpECS in the space environment is a highly relevant study today. The most common application is the construction of spacecrafts and satellites. MISSE-6 is of significance because it alone comprises ~10% of all the samples that have ever flown in space and been returned to earth in pristine condition for scientific analysis. The understanding gained from this analysis will allow for proper material choice to allow for space components with lengthened durability and less frequent repairs.

James Webb Space Telescope, NASA's current flagship project, hoping to replace the Hubble, will be sent into space far beyond repairable range, see Figure 2 (4). The two large blue panels featured on the JWST are each about the size of a tennis court and are made of metal coated polymers, much like my sample of interest. This sensitive optical equipment will be launched further into the vastly unknown space environment than any permanent equipment thus far with an operational lifetime measured in decades. It therefore requires careful consideration in choice of materials for maximum time before erosion renders it useless.

MISSE samples are also found in other space component designs such as astronaut's space suits (8). NASA's typical space suit is comprised of seven layers of which three are Mylar™. Understanding how these materials degrade is essential not only to equipment functioning but to astronaut's lives as well.

The specific motivation for this research project stems from the MISSE-6 experiment, particularly the afore mentioned VDA coated Mylar™ sample. Preliminary analysis of this sample shows evidence of atomic oxygen erosion of the aluminum layer, exposing the white Mylar™ underneath, see Figure 4. This simulation focuses on recreating the UV radiation portion of the sample's exposure for in depth understanding of how UV radiation erodes materials.

Past Work

The SUSpECS investigation started in 2007 when materials were gathered and began undergoing pre-flight testing that would allow for comparison upon their return (5). USU's SUSpECS trays were assembled by previous undergrads and the Get Away Special program at USU (6). USU's three trays were integrated


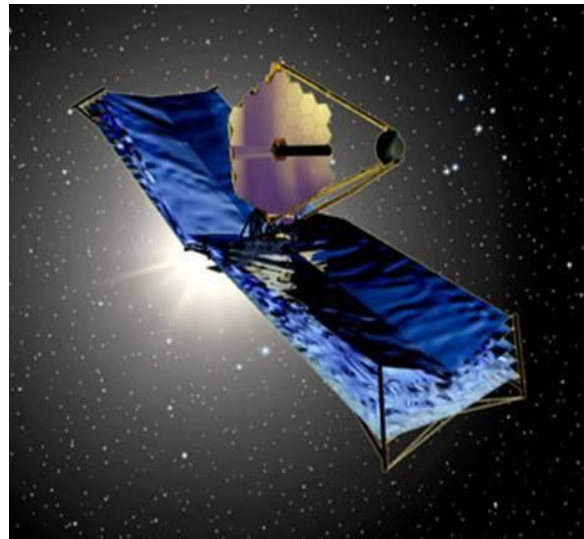


Figure 2, (above)
James Webb
Space Telescope
(JWST) NASA's
current flagship
project.

Figure 3, (right)
Typical layers of a
NASA spacesuit.

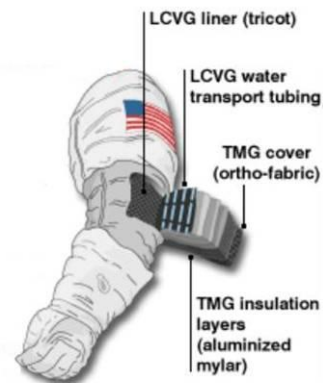

into the larger array with samples from other universities and organizations, see figure 4. In 2008 the USU SUSpECS samples were launched with other MISSE-6 samples, suspended from ISS on the Columbus Space Laboratory for 18 months (9). In 2009 USU undergrads went and retrieved our samples from NASA Langley Space Flight Center; they were in pristine conditions to bring back to USU. At this point, the post-flight analysis began (10).

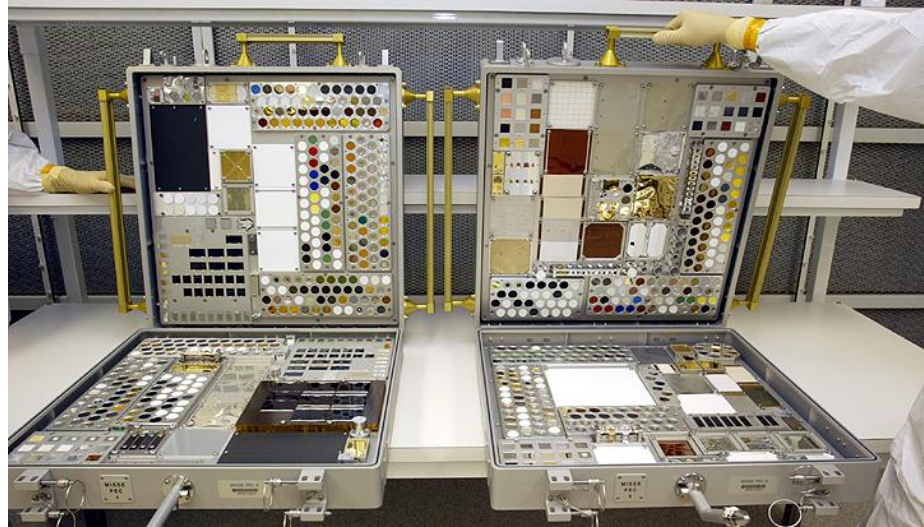


Figure 4 MISSE-6 samples, pre-flight, with USU's SUSpECS integrated.


Degradation of VDA coated Mylar™

From 2009 until the present the samples have undergone post-flight analysis. The comparisons to the pre-flight analysis have allowed for a clearer understanding of the effects of the space environment. The effects vary from sample to sample depending on the properties of the sample.

Of the numerous samples in USU's contribution to MISSE-6, a sample, Vapor Deposited Aluminum coated Mylar™, is of particular interest due to its degradation, see Figure 5. Among various other methods, this sample has undergone three easily recognizable forms of degradation: atomic oxygen erosion, UV degradation, and a micrometeoroid impact. This case study will describe these multiple forms of degradation and the analysis of each stage of degradation.

Atomic Oxygen Erosion

Atomic oxygen erosion is a two part process. First, the prevalent O₂ molecules are split into single, atomic, oxygen atoms through UV photoionization, see Figure 6. These atomic oxygen atoms interact strongly with the materials and chemically erode the material, see Figure 7. This

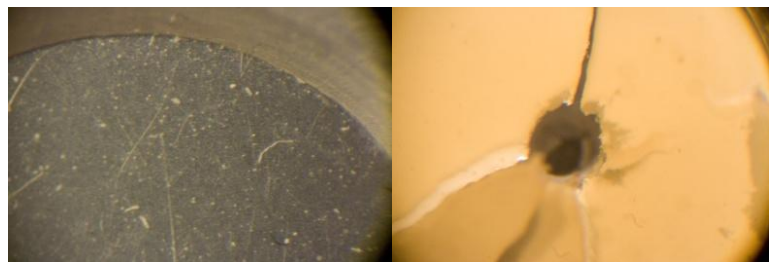

Before

After

Figure 5 VDA coated Mylar™ pre- and post- ISS flight.

process is very similar to the rusting of iron here on Earth, though due to the lack of a protective O-zone layer and in turn the presence of atomic oxygen this process happens much more rapidly and to a wider variety of materials than observed on earth. The VDA coated Mylar™ underwent atomic oxygen erosion that ate away at the aluminum layer exposing the white Mylar™ underneath.

UV Degradation

Once the atomic oxygen erosion removed the VDA coating exposing the white Mylar™ underneath, it became much more susceptible to UV degradation. Much like the creation of atomic oxygen, where the UV radiation broke the bonds of the O₂ molecules, UV radiation breaks the bonds within the polymer causing the polymer to yellow, see figure 8. Again, without the O-zone to protect from UV radiation this process happens much more quickly in space. While yellowing may not seem significant, it changes the properties of the material and thus can vastly change how it responds and affects spacecraft functioning (11).

In order to gain a more in depth understanding of the undergone UV degradation and the timescales over which this occurs a ground simulation was created to replicate the UV degradation undergone by the Mylar™ while on the ISS. An ellipsoidal reflector was designed to maximize the exposure of the samples by directing the light to a focal point where the samples can be placed, see figure 9. The specific configuration of the lighting combined with the designed ellipsoidal reflector allow this deuterium lamp to simulate the UV solar radiation undergone in a condensed time frame.

In order to estimate a rate at which the UV degrades the material, three samples were placed various distances from the focal point to so that they would be exposed to various intensities of

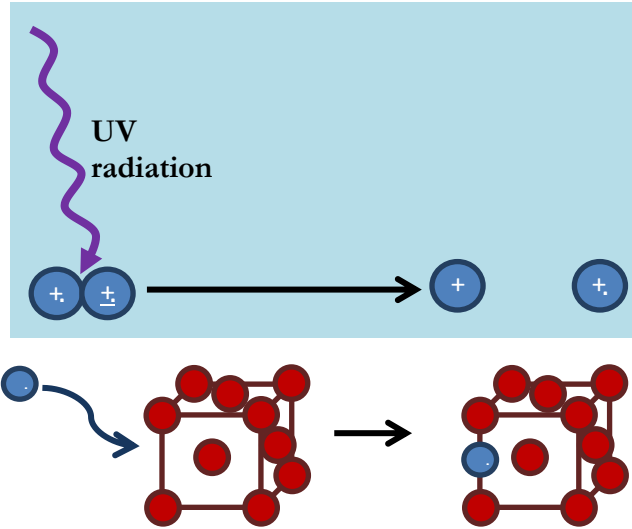


Figure 6, (left) Creation of atomic oxygen by UV radiation breaking the bonds holding the 2 oxygen atoms together in a stable unit.

Figure 7, (below) Atomic oxygen interacting with the crystalline structure of polymers to disrupt and degrade them.

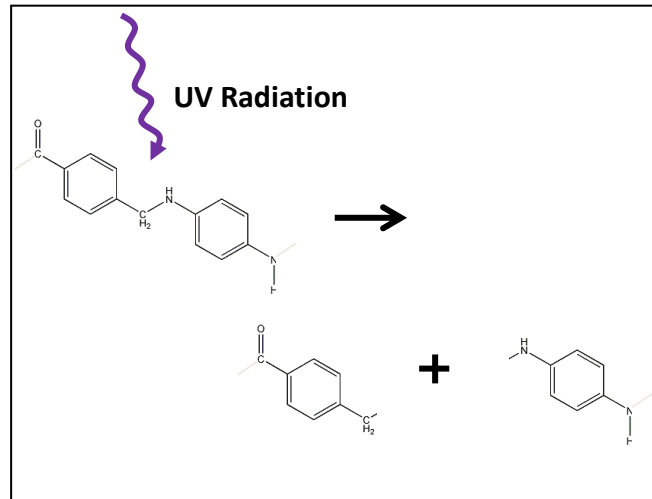


Figure 8 UV Radiation breaking the bonds of the polymer and yellowing the material.

UV light. To most accurately represent the space environment the Mylar™ samples were placed under vacuum for the duration of their exposure.

For the closest sample the reflector provides an enhancement factor of about 8. Combined with the intensity acceleration factor of the lamp, only ~3.3% of the time the sample was in space, or approximately 18 days is required to get the equivalent UV exposure seen by the MISSE samples. Due to the harmful effects of UV light this entire configuration was placed within a light-tight solar UV light containment box for the simulation.

Micrometeoroid Impact

As is notably visible in figure 13, the Mylar™ sample was struck by space debris while suspended from the ISS. In order to analyze the impact two assumptions were made; first that the impacting object was roughly spherical and second that it was comprised of astroidal debris rather than cometary. Through calculations of the velocity of ISS and in turn the kinetic energy of the micrometeoroid calculations of the mass of micrometeoroid were made, see table (14). It was found to be an approximate 182 Million to 1 chance that this particular sample was struck.

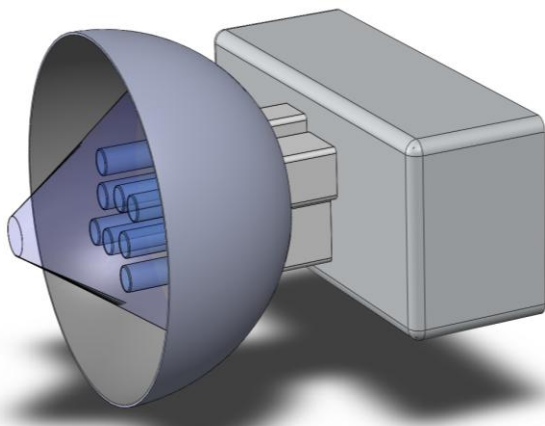


Figure 9, (top left) The bluish portion of the solid model represents the light cone and focal point of the reflector.

Figure 10, (top right) The light array is an image of the deuterium lamp configuration that allows for uniform light

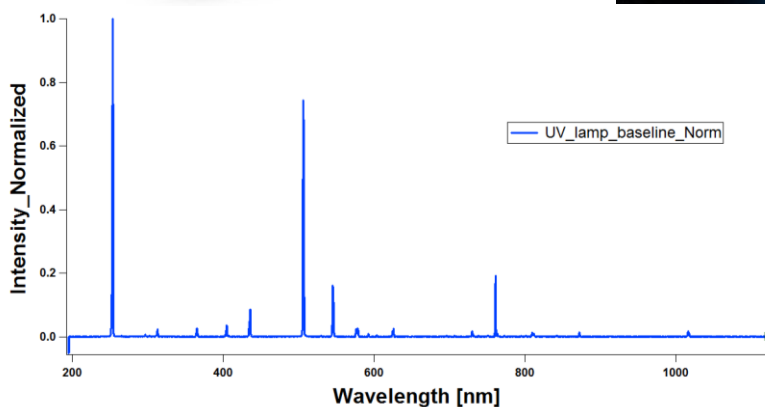


Figure 11, (bottom left) Wavelength spectra of the UV/deuterium lamp configuration, pictured above. Note the intense peak at 250 nm, right in the range of UV spectrum of UV in vacuum.

Figure 12, (bottom right) Mini vacuum chambers were assembled to house the samples during the UV




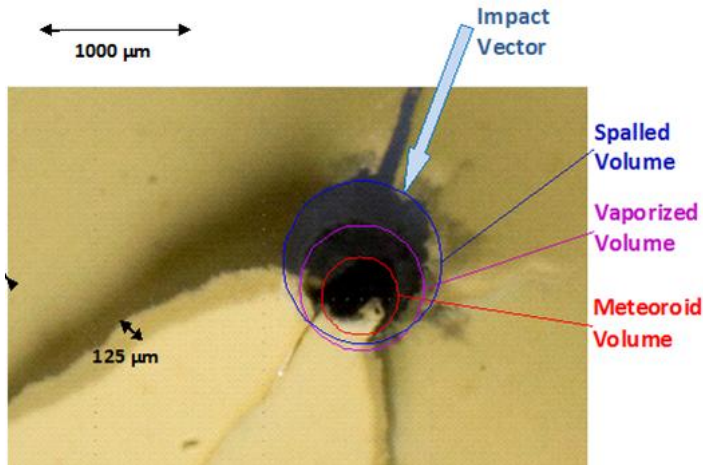


Table I. Sample and impact specifications deduced from the impact crater analysis.

Diameter of Exposed Mylar:	9mm
Diameter of Vaporized Region:	1.0 mm
Diameter of Spall volume:	1.5 mm
Diameter of Micrometeoroid:	529 μm
Thickness of Mylar Sample:	125 μm
Volume of Micrometeoroid:	$7.7 \times 10^{-5} \text{ cm}^3$
Density of Micrometeoroid:	3.5 gm/cm^3
Mass of Micrometeoroid:	$2.7 \times 10^{-4} \text{ gm}$

Figure 13, (above) Detailed analysis of the impact crater of the micrometeoroid impact in SUSpECS' Mylar™

Figure 14, (right) Impact probability of a micrometeoroid striking a SUSpECS sample and penetrating through a SUSpECS sample.

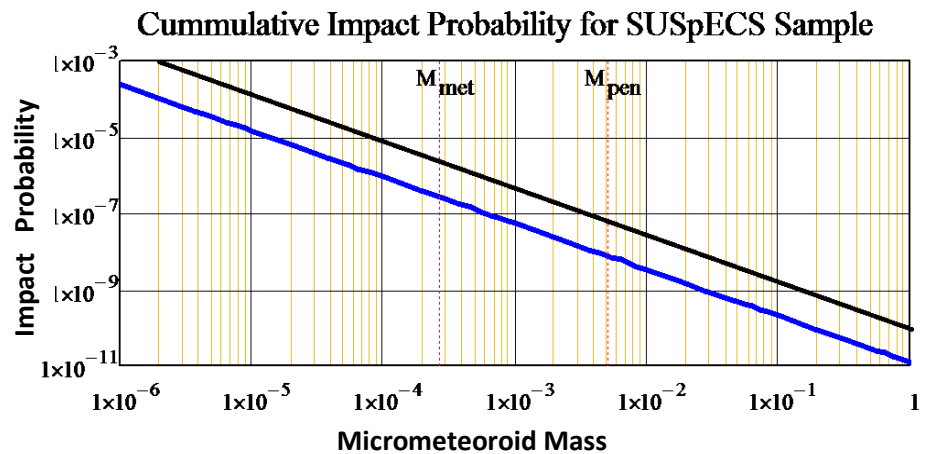

Future Work

Work on analysis of the effects of space environment exposure on the 168 samples has only begun. Measurements of optical and electron microscopy, reflectivity, FTIR, emissivity, mass loss, electron-, ion- and photon-induced electron emission, photoyield, AES, photoemission, and variable angle UV/VIS/NIR reflectivity will continue. Work will also progress in collaboration with the AEDC space simulation facility to understand the origins of these effects and quantify their impacts (15).

References

- (1) JR Dennison, Amberly Evans, Danielle Fullmer and Joshua L. Hodges, "Charge Enhanced Contamination and Environmental Degradation of MISSE-6 SUSpECS Materials" Institute of Electrical and Electronics Engineering, 20
- (2) J.R. Dennison, C.D. Thomson, J. Kite, V. Zavyalov and, Jodie Corbridge, "Materials Characterization at Utah State University: Facilities and Knowledgebase of Electronic Properties of Materials Applicable to Spacecraft Charging," Proceedings of the 8th Spacecraft Charging Technology Conference, (NASA Marshall Space Flight Center, Huntsville, Al, October 2003), 15 pp.

- (3) Krasowski MJ, Prokop NF, Flatico JM, Greer LC, Jenkins PP, Jenkins PP, Neudeck PG, Chen L, Spina DC. "An improved communication architecture for real-time monitoring of aerospace materials, instruments, and sensors on the ISS," *The Scientific World Journal*. 2013, 12 pp.
- (4) The James Webb Space Telescope, *Space Science Reviews*, by J. Gardner et al, May 15, 2006
- (5) J.R. Dennison, L. Pearson, L Davis, J.W. Burns, R.S. Hyde, James S. Dyer, Tina Andrus, Andrew Auman, Jeff Duce, Time Neilsen, and Rob Leishman, "State of Utah Space Environment & Containment Study (SUSpECS): A MISSE-6 Payload to Investigate Their Effects on Electron Emission and Resistivity of Spacecraft Materials," *Spacecraft Charging Conference*, 2009
- (6) J.R. Dennison, L. Pearson, L. Davis, J.W. Burns, R.S. Hyde, James S. Dyer, Tina Andrus, Andrew Auman, Jeff Duce, Tim Neilsen, Rob Leishman "State of Utah Space Environment & Contamination Study (SUSpECS) MISSE-6 Payload to Investigate Their Effects on Electron Emission and Resistivity of Spacecraft Materials," *Proceedings of the 9th Spacecraft Charging Technology Conference*, (Epochal Tsukuba, Tsukuba, Japan, April 4-8, 2005), 7 pp.
- (7) Kelby Peterson and JR Dennison, "Micrometeoroid from MISSE Examined to Understand the Effects of the Space Environment on Space Suit Materials," *National Council for Undergraduate Research*, Weber State University, Ogden, UT, 2012
- (8) Kelby Peterson and JR Dennison, "Micrometeoroid from MISSE Examined to Understand the Effects of the Space Environment on Space Suit Materials," *Utah State University Student Showcase*, Logan, UT, 2012 -
- (9) Kelby Peterson and JR Dennison, "Space Impact Ejecta Model of Micrometeoroid Collision on MISSE-6," *Air Force Research Laboratory*, Albuquerque, NM, October 25, 2012
- (10) Kelby Peterson and JR Dennison, "Space Impact Ejecta Model of Micrometeoroid Collision on MISSE-6," *American Physical Society Four Corner Section Meeting*, New Mexico Institute of Mining and Technology, Socorro, NM, October 26-27, 2012
- (11) Kelby Peterson and JR Dennison, "Simulation of UV Radiation Degradation of Polymers on MISSE-6 in the Low Earth Orbit Environment," *Utah Council of Undergraduate Research*, Logan, UT, 2013
- (12) Kelby Peterson and JR Dennison, "Simulation of UV Radiation Degradation of Polymers on MISSE-6 in the Low Earth Orbit Environment," *Utah Research on Capitol Hill*, Salt Lake City, UT, 2013
- (13) Kelby Peterson and JR Dennison, "Simulation of UV Induced Discoloration on Space Polymers," *Society of Physics Students Zone 15 Regional Conference*, Orem, UT, 2013
- (14) Kelby Peterson and JR Dennison, "UV Radiation Degradation of Space Polymers: A Case Study," *Utah State University Student Showcase*, Logan, UT, 2013
- (15) Kelby Peterson and JR Dennison, "Simulation of UV Radiation Degradation of Polymers on MISSE-6 in the Low Earth Orbit Environment" *Utah State University Physics Colloquium Invited Talk*, Logan, UT, 2013
- (16) Kelby Peterson and JR Dennison, "Simulation of the Degradation Affects of UV Exposure in the ISS Low Earth Orbit Environment" *Utah State University Summer Undergraduate Research and Creative Opportunity Minigrant*, Logan, UT, 2013.